




SafeGuard

Cordless Sensor Light

CONSUMER MANUAL

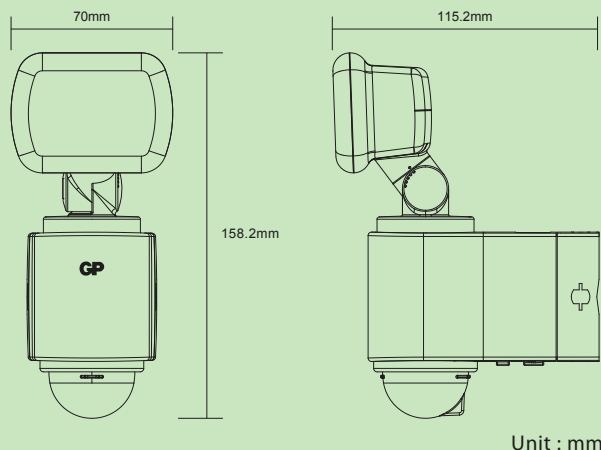

Benefits

- Battery operated (cordless)
- Easy and simple to install
- Long operating time
- Easy battery replacement

Specifications

- | | |
|--------------------------|---|
| • Luminous intensity | 60 lm |
| • Powered by | 3 x AA |
| • Operating time* | 600 days |
| • Sensor | Automatic motion & photo sensor detection |
| • Sensor detection range | 8 meters & 110 degrees |
| • Adjustable headlamps | Up & down, left & right |
| • Light modes | On / Off / Auto |
| • Detection time | Auto mode : 10 seconds |
| • IP rating | IP55 |
| • Product dimension | 159.3 x 70 x 113.4mm |
| • Fitting | Wall or ceiling mount |

* On auto mode with new alkaline batteries based on 5 operations per day.

Applications

Driveways, garages, patios, back gardens and doorways



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Copyright@ GPI International Ltd.- All rights reserved



Product of Gold Peak Group

gp-lighting.com



GP [BATTERY EXPERTS]



SafeGuard

Cordless Sensor Light

CONSUMER MANUAL

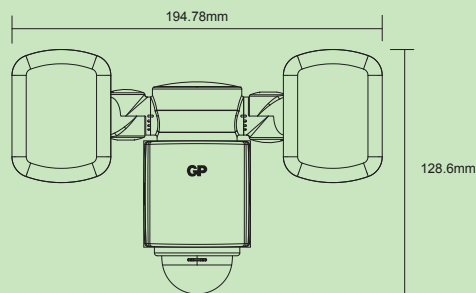

Unit : mm



Benefits

- Battery operated (cordless)
- Easy and simple to install
- Long operating time
- Easy battery replacement

Specifications

- | | |
|--------------------------|---|
| • Luminous intensity | 120 lm |
| • Powered by | 3 x AA |
| • Operating time* | 300 days |
| • Sensor | Automatic motion & photo sensor detection |
| • Sensor detection range | 8 meters & 110 degrees |
| • Adjustable headlamps | Up & down, left & right |
| • Light modes | On / Off / Auto |
| • Detection time | Auto mode : 10 seconds |
| • IP rating | IP55 |
| • Product dimension | 128.6 x 194.8 x 113.5mm |
| • Fitting | Wall or ceiling mount |

* On auto mode with new alkaline batteries based on 5 operations per day.

Applications


Driveways, garages, patios, back gardens and doorways



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Copyright© GPI International Ltd.- All rights reserved



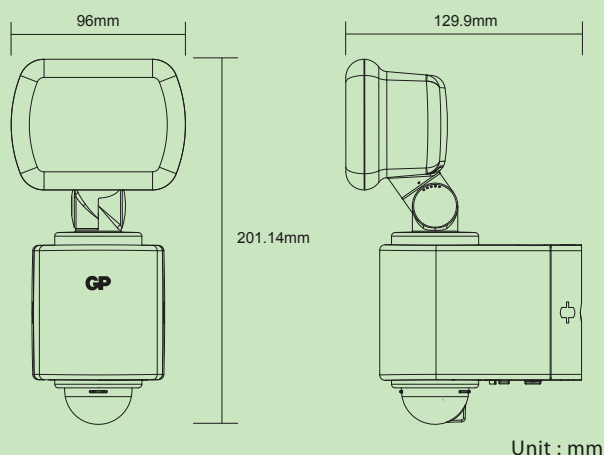

Benefits

- Battery operated (cordless)
- Easy and simple to install
- Long operating time
- Easy battery replacement

Specifications

- | | |
|--------------------------|---|
| • Luminous intensity | 130 lm |
| • Powered by | 3 x C |
| • Operating time* | 600 days |
| • Sensor | Automatic motion & photo sensor detection |
| • Sensor detection range | 8 meters & 110 degrees |
| • Adjustable headlamps | Up & down, left & right |
| • Light modes | On / Off / Auto |
| • Detection time | Auto mode : 10 seconds |
| • IP rating | IP55 |
| • Product dimension | 201.1 x 96 x 129.9mm |
| • Fitting | Wall or ceiling mount |

* On auto mode with new alkaline batteries based on 5 operations per day.

Applications

Driveways, garages, patios, back gardens and doorways






SafeGuard

Cordless Sensor Light

CONSUMER MANUAL

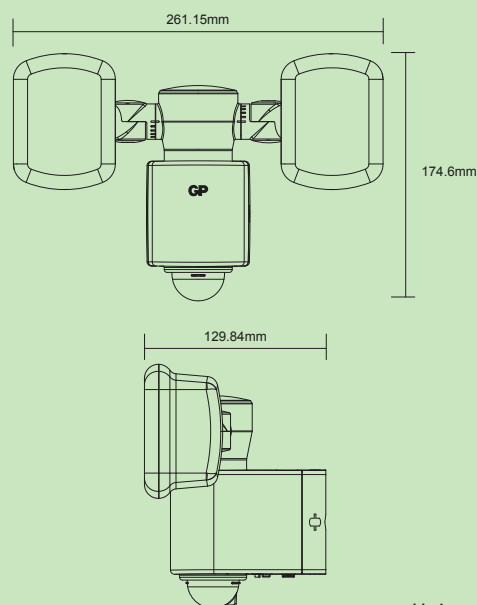

Unit : mm

Benefits

- Battery operated (cordless)
- Easy and simple to install
- Long operating time
- Easy battery replacement

Specifications

- | | |
|--------------------------|---|
| • Luminous intensity | 260 lm |
| • Powered by | 3 x C |
| • Operating time* | 300 days |
| • Sensor | Automatic motion & photo sensor detection |
| • Sensor detection range | 8 meters & 110 degrees |
| • Adjustable headlamps | Up & down, left & right |
| • Light modes | On / Off / Auto |
| • Detection time | Auto mode : 10 seconds |
| • IP rating | IP55 |
| • Product dimension | 174.6 x 261.1 x 129.8mm |
| • Fitting | Wall or ceiling mount |

* On auto mode with new alkaline batteries based on 5 operations per day.

Applications

Driveways, garages, patios, back gardens and doorways



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Copyright© GPI International Ltd.- All rights reserved

